

PULMOX

TBR TYRES


DEVELOPED AND
PRODUCED BY

ÖZKA



CHALLENGE THE ROADS WITH PULMOX!

Discover the high performance of Pulmox TBR Tyres.

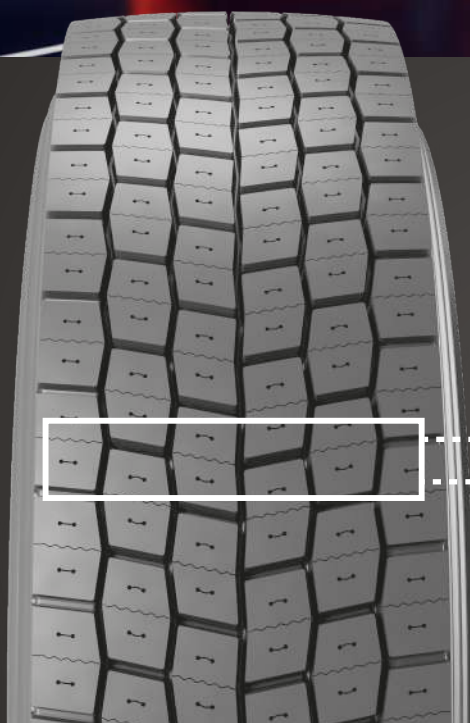


PX 300

Usage Area: Drive Axle Asphalt

- Strong carcass structure
- Long-term use
- Suitable for coating
- Balanced and comfortable drive
- High maneuverability
- 3MPSF (snowflake symbol)

		295/80 R22.5	315/80 R22.5	315/70 R22.5	
TYRE INFO		TT/TL	TL	TL	
		LI / SI	152/ 148 L	156 / 150 L	150 L / 150 M
		3MPSF	Yes	Yes	Yes
		M+S	Yes	Yes	Yes
RIM		Rec. Rim (inch)	9.00	9.00	9.00
		Alt. Rim (inch)	8.25	9.75	9.75
		TECHNICAL INFORMATION		Single Mounting	3550
Dual Mounting	3150			3350	3350
Axle (Single Mounting)	7100			8000	6700
Axle (Dual Mounting)	12600			13400	13400
LI Details (kg)					
SI Details (km/h)		120	120	120/ 130	
Inflation Pressure (psi)		123	123	132	
UNLOADED INFLATED DIMENSIONS		Overall Diameter (mm)	1044	1076	1014
		Section Width (mm)	298	312	312

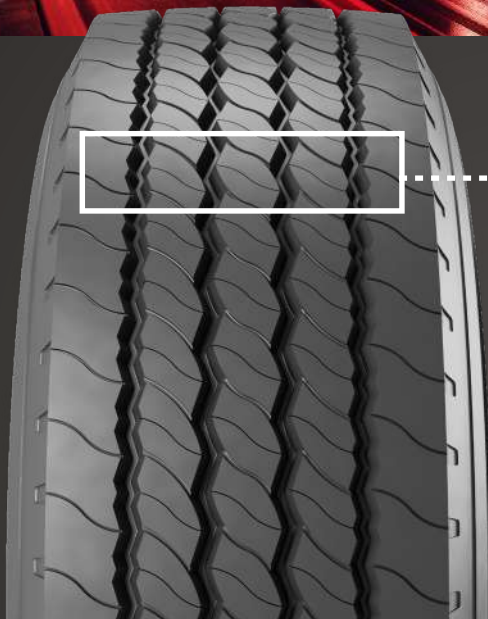

PT 200

Usage Area: Trailer Asphalt

- Strong carcass structure
- Long-term use
- Suitable for coating
- Design which distributes pressure evenly under load
- 3MPSF (snowflake symbol)

		385/65 R22.5	
TYRE INFO		TT/TL	TL
		LI / SI	160 K
		3MPSF	Yes
		M+S	Yes
RIM		Rec. Rim (inch)	11.75
		Alt. Rim (inch)	12.25
TECHNICAL INFORMATION	LI Details (kg)	Single Mounting	4500
		Dual Mounting	-
		Axle (Single Mounting)	9000
		Axle (Dual Mounting)	-
	SI Details (km/h)		110
	Inflation Pressure (psi)		132
UNLOADED INFLATED DIMENSIONS	Overall Diameter (mm)		1072
	Section Width (mm)		389



PM 100

Usage Area: Drive Axle On-Off

- Strong carcass structure
- Suitable for coating
- Pattern suitable for excavation sites
- Maximum traction
- Minimal jamming with stone throwers
- 3MPSF (snowflake symbol)

		315/80 R22.5	
TYRE INFO		TT/TL	TL
		LI / SI	156 / 150 K
		3MPSF	Yes
RIM		M+S	Yes
		Rec. Rim (inch)	9.00
		Alt. Rim (inch)	9.75
TECHNICAL INFORMATION	LI Details (kg)	Single Mounting	4000
		Dual Mounting	3350
		Axle (Single Mounting)	8000
		Axle (Dual Mounting)	13400
	SI Details (km/h)		110
	Inflation Pressure (psi)		123
UNLOADED INFLATED DIMENSIONS	Overall Diameter (mm)		1076
	Section Width (mm)		312



 **PULMOX**

PULMOX

TBR TYRES



HEADQUARTER/FACTORY

Bağlar Mh. Urfa Bulvarı No: 109c/32

Bağlar/DİYARBAKIR/TÜRKİYE

Tel : +31 687 629585

info@hombanden.nl

SALES OFFICE/WAREHOUSE

Bağlar Mh. Urfa Bulvarı No: 109c/32

Bağlar/DİYARBAKIR/TÜRKİYE

Tel : +31 687 629585

info@hombanden.nl



hombanden.holland



HomBanden

www.hombanden.nl